


Angle seat valve(2/2 way)

AirTAC

2J Series



Symbol




Product feature

1. Air-control is adopted, can be used in non-electric, inflammable and explosive circumstance, the start-up pressure is low, and the high pressure could be controlled by the low pressure.
2. The accessories such as noumenon and slide bar are made of stainless steel, and are of excellent rustproof; the sealing is employed with Teflon, could be applied extensively, and could be used for high temperature liquid and strongly corrosion liquid, etc.
3. The structure of valve is a 45° angle seat, the inner chamber is streamlined designed, the tunnel resistance could be reduced, and the fluid could be flowed much smoother, so that the high flow rate could be achieved; filtration core is added in connection bar to prevent the entrance of impurity, and the life-span could be extended.
4. Actuator is equipped with visual positioning indicator, the open size of angle seat valve could be observed and the flow rate could be adjusted, and the indicative window could be replaced by limit switch or emergency hand gear too;
5. Control point is of metal insert. Mounting plate can be used to mount NAMUR value.
6. The actuator part can be rotated 360°, and is easily installed.

Ordering code

2J S K 150 15 Q50 G

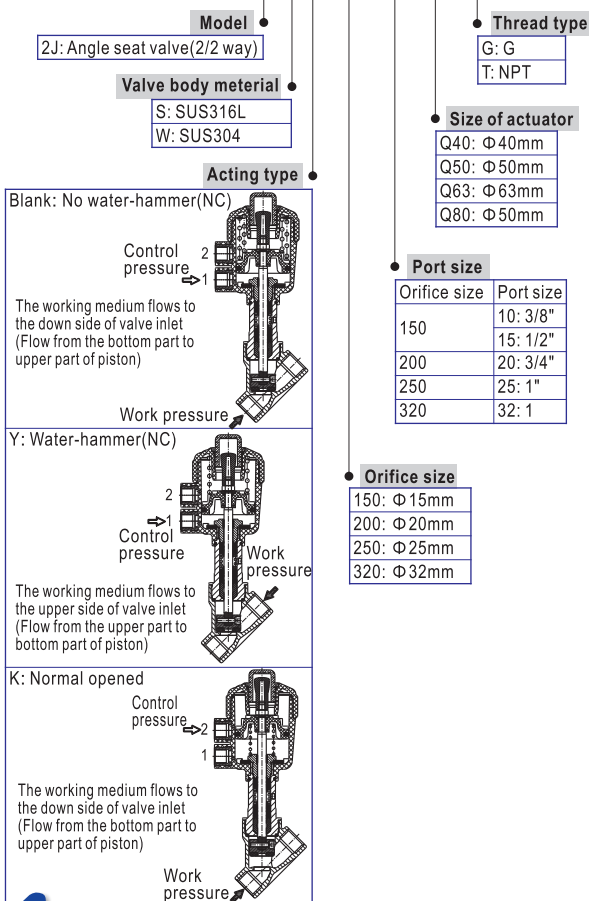


Specification

Model\Item	Port	Actuator size(mm)	Orifice size(mm)	Kv	Min.pilot pressure(bar)	Max. differential pressure(bar)	Weight (kg)	
2JS150 2JW150	-10 3/8"	40	15	4.4	4.8	13	0.8	
	-15 1/2"			4.8			0.7	
	-10 3/8"	50		4.8	4.3	16	0.8	
	-15 1/2"			4.8			0.7	
2JS200 2JW200	-20 3/4"	40	20	7.9	4.8	6.5	0.9	
		50		8	4.3	11	0.95	
		60		10	4.2	16	1.6	
2JS250 2JW250	-25 1"	63	25	19	4.2	11	1.9	
		80		20	5.0	16	2.5	
2JS320 2JW320	-32 1 1/4"	63	32	27	4.2	6	2.5	
		80		28	5.0	15	3.0	
2JSK150 2JWK150	-10 3/8"	40	15	4.4	For details, please refer to normally-opened-type fluid pressure – control pressure curve	16	0.8	
	-15 1/2"			4.8			0.7	
2JSK200 2JWK200	-10 3/8"	40		4.8		16	0.8	
	-15 1/2"			4.8			0.7	
2JSK250 2JWK250	-20 3/4"	40	20	7.9		16	0.9	
	50	8		16		0.9		
2JSK250 2JWK250	-25 1"	50	25	14.5		16	1.2	
		63		19		16	1.6	
2JSK320 2JWK320	-32 1 1/4"	63	32	27	16	2.2		
		80		28	16	2.4		
2JSY150 2JWY150	-10 3/8"	40	15	4.4	For details, please refer to normally-closed-water-hammer-type fluid pressure – control pressure curve	16	0.8	
	-15 1/2"			4.8			0.7	
	-10 3/8"	50		4.8		16	0.8	
	-15 1/2"			4.8			0.7	
2JSY200 2JWY200	-20 3/4"	40	20	7.9		16	0.9	
		50		8		16	0.9	
2JSY250 2JWY250	-25 1"	50	25	14.5		16	1.3	
		63		19		16	1.7	
2JSY320 2JWY320	-32 1 1/4"	63	32	27	16	2.3		

Operation and maintenance

1. Before using, please verify that if the working status of product is identical with data in catalogue, and it should not exceeds the limits.
2. Before the pressure releasing and cooling of system, no maintenance, examination and installation of product should be conducted.
3. For the normally-closed-type, when its valve is disassembled, due to the pre-pressure of the relatively large spring power in controller, the "1" hole should be opened for ventilation in advance so to make sure the piston could be completely moved to the position, then rotate the screw thread between the valve and the connection bar, direct rotation is forbidden, otherwise the disassembling would not be conducted in result of the scuffing of screw thread.
4. If maintenance of actuator part is needed, special tools should be used for disassembling and installation, while disassembling, the loading spring could cause damage. If the customer can not conduct the maintenance, please return the value to manufacturer for maintenance.



Angle seat valve(2/2 way)

AirTAC


2J Series





2J

Fluid pressure — control pressure curve


Normal opened

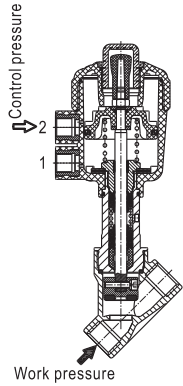



The working medium flows to the down side of valve inlet



Water-hammer(NC)



The working medium flows to the upper side of valve inlet




Ambient and medium temperature

Control medium	Air, neutral air(to be filtered by 40 μm filter element)
Max. control pressure	Size of actuator Φ40, 50, 63: 10bar Size of actuator Φ80: 7bar
Medium①	air, liquid, vacuum, steam
Viscosity limit	600mm ² /s below
Temperatur②	-20~+180℃
Ambient temp③	-10~+60℃

Note: ① The water-hammer-type can be used for air, or steam only, and can not be used for liquid.


② Dew point: -20℃ or less.

③ Relationship of working medium temperature and ambient temperature is shown in following figure.




Inner structure

2JS150-Q50

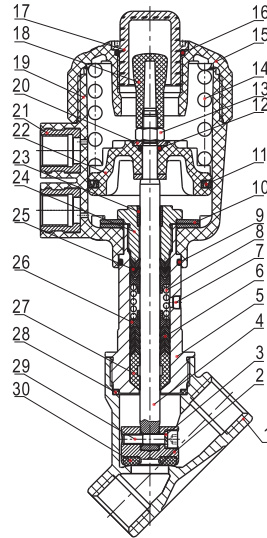

No.	Item	Material
1	Body	Stainless steel
2	Piston	Stainless steel
3	Spring washer	Spring steel
4	Piston rod	Stainless steel
5	Pitman	Stainless steel
6	V-seals	PTFE
7	Filter core	Bronze
8	Spring	Spring steel
9	O-ring	NBR
10	Bellville spring	Spring steel
11	O-ring	NBR
12	O-ring	NBR
13	Hexagon nut	steel
14	Spring	Spring steel
15	Top cover	PA6
16	O-ring	NBR
17	Transparent cap	Plastic
18	Indicative	Plastic
19	Cylinder body	PA6
20	Washer	SPCC
21	Built-in nut	Brass nickel-plate
22	Piston	PA6
23	DU dry bearing	Wear resistant material
24	Connect nut	Brass
25	O-ring	Viton
26	Spring holder	PTFE
27	Guide sleeve	PTFE
28	Seal washer	PTFE
29	Screw	Stainless steel
30	Seal washer	PTFE

Dimensions

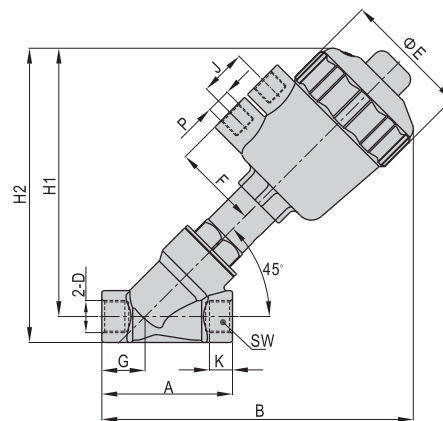

Orifice size(DN)	Port size(D)	Size of actuator	B	ΦE	F	A	J	P	H1	H2	K	G	SW
15	3/8"	Φ40	153	56	33	68		1/8"	130	144	12	22.5	27
	1/2"	Φ50	162	66	44			1/4"	140	153			
		Φ40	161	56	33			1/8"	134	150			
20	3/4"	Φ50	170	66	44	78		1/4"	143	160		27	33
		Φ63	200	82	51			1/4"	172	189	14		
		Φ50	176	66	44			1/4"	147	168			
25	1"	Φ63	205	82	51	90		1/4"	176	197		28	40
		Φ80	221	102	60			1/4"	193	213			
32	1 1/4"	Φ63	220	82	51			1/4"	185	210	18	35	50
		Φ80	237	102	60	110		1/4"	202	227			